


Controlmatic

Automatic Device for electric pump integral control.

Controlmatic is a compact device for the automatic control and protection of electric pumps, its patented system includes special electronic sensor of flow and pressure, integrated in electronic circuit that guides the electric pump operation and keeps pressure and flow accordingly. Moreover, it has a safety system to avoid the dry-running operation.

Controlmatic replaces the system of hydrosphere, pressure-switch, check-valve and level switches, with the advantage of smaller dimensions and periodic maintenance elimination. The unit automatically starts the electric pump when any point of use is open and stop it –after a 10 seconds programmed time– when closing the consumption point.



Controlmatic F12

Controlmatic F15

Controlmatic F22

Controlmatic R

OPERATING CHARACTERISTICS

- No maintenance.
- Installation time saving.
- Protection against water hammer effect.
- Compact and reduced dimensions.
- Removal of protecting devices (level switches).
- Avoids the pump oversizing using integrately their flowpressure curve.
- Integrated protection system which stops the pump in case of dry-running operation.
- Control panel:
 - Yellow Led POWER.
 - Green Led ON.
 - Red Led FAILURE.
 - Tactile push button for manual start.
- Electronic circuit group with protection cover easily replaceable.
- Integrated accumulation system, spring-membrane set, preventing pump's cycling as a result of dripping taps or small losses in the hydraulic installation.
- Other options like pressure gauge, connecting cables, adjustable starting pressure.
- EMC and electrical safety certified.
- Schuko socket integrated in the cover (optional) - Controlmatic E - IP44



Low Voltage Directive 2014/35/EC
Electromagnetic Compatibility 2014/30/EC
RoHS 2011/65/EC + 2015/863/EC


TECHNICAL CHARACTERISTICS

	F12	F15	F22	R
Start pressure	1,2 bar	1,5 bar	2,2 bar	1,5-2,5 bar
Power	1,5kW	1,5kW	1,5kW	1,5kW
Voltage	1~230 V/1~120 V	1~230 V/1~120 V	1~230 V/1~120 V	1~230 V/1~120 V
Frequency	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
Max peak of current	10 A; cos fi \geq 0.6	10 A; cos fi \geq 0.6	10 A; cos fi \geq 0.6	10 A; cos fi \geq 0.6
Protection degree	IP65	IP65	IP65	IP65
Maximum temperature	50 °C	50 °C	50 °C	50 °C
Maximum pressure	10 bar	10 bar	10 bar	10 bar
Maximum flow	8.000 l/h	8.000 l/h	8.000 l/h	8.000 l/h
Net weight (without cables)	1,15 Kg	1,15 Kg	1,15 Kg	1,15 Kg

CONTROL PANEL



INSTALLATION

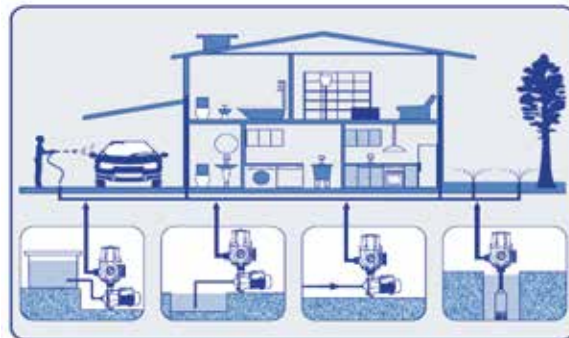

DIMENSIONS

