

Speedcenter

Comunication center between units Speedmatic, Speedbox and Speedboard.

It can be comunicated up to 4 units Speedmatic, Speedbox and Speedboard MASTER operating in MASTER-SLAVE mode, managing the start and stop of these devices. Speedcenter includes a control panel with LCD screen, warning led-lights, push-buttons for configuration and manual start-stop. I




S101040

S101228

SELECTION TABLE

	S101040	S101228
Speedmatic - complete range	✓	
Speeedbox - complete range		✓
Speedboard 1006MT - 1010MT	✓	
Speedboard 1305TT - 1309TT - 1314TT		✓

CONTROL PANEL

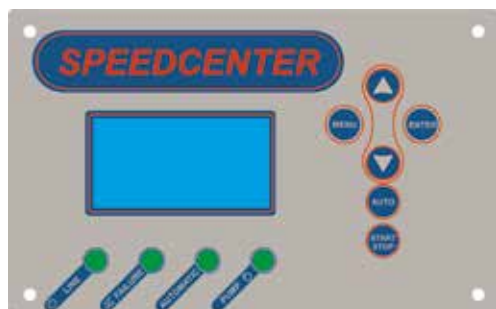

Control panel includes LCD screen, warning leds, push-buttons, START-STOP, AUTOMATIC and configuration system.

TECHNICAL CHARACTERISTICS

	S101040	S101228
General supply voltage	12 Vcc *	~ 1 x 230 Vac
Communication points	4	
Wiring	4 x 0,25	
Protection index	IP65	
Max environment temperature	55 °C	
SCREEN	STN-GRAFIC 64 X 128 digits	

* Through Speedmatic's communication cable

DIMENSIONS

